

FP-00C-LD0

LC Plug for Plastic Optical Fiber

Datasheet



DESCRIPTION

Firecomms LC plugs can be assembled easily onto a plastic optical fiber (POF) duplex cable to prepare it for use with Firecomms LC transceivers. The LC system offers a compact termination ideal for applications requiring robust plug retention and endurance against vibrations and mechanical shock.



Table 1
ORDERING INFORMATION / PART NUMBERS

Part Number	Name	Description
FP-00C-LD0	LC Plug for POF	LC plug for POF
FG-00C-LZ0	LC Dust Cap	White dust cap to fit LC plug

APPLICATIONS

- Control links within high voltage electrical control equipment
- Links between equipment that requires electrical isolation to be maintained
- Rugged links in hostile environments

FEATURES

- Cost-effective, rugged optical links
- Field termination
- High Retention Force
- Compatible with Firecomms FP-500-0DB POF
- LC plugs available for easy cable termination
- Compliant to IEC 61754-20 Edition 2

Table 2
LC Plug Specifications

Parameter	Symbol	Min	Typical	Max	Unit
Storage Temperature	T_{stg}	-40		+85	°C
Operating Temperature	T_{op}	-40		+85	°C
Installation Temperature	T_i	0		+70	°C
Retention Force, Connector to Transceiver	F_R	100			N
Insertion Force, Connector to Transceiver	F_i		9	12	N
Durability, Mating Cycles		500			
Standards Compliance	IEC 61754-20 Edition 2				
Fixing Method	Crimp				

MECHANICAL DIMENSIONS

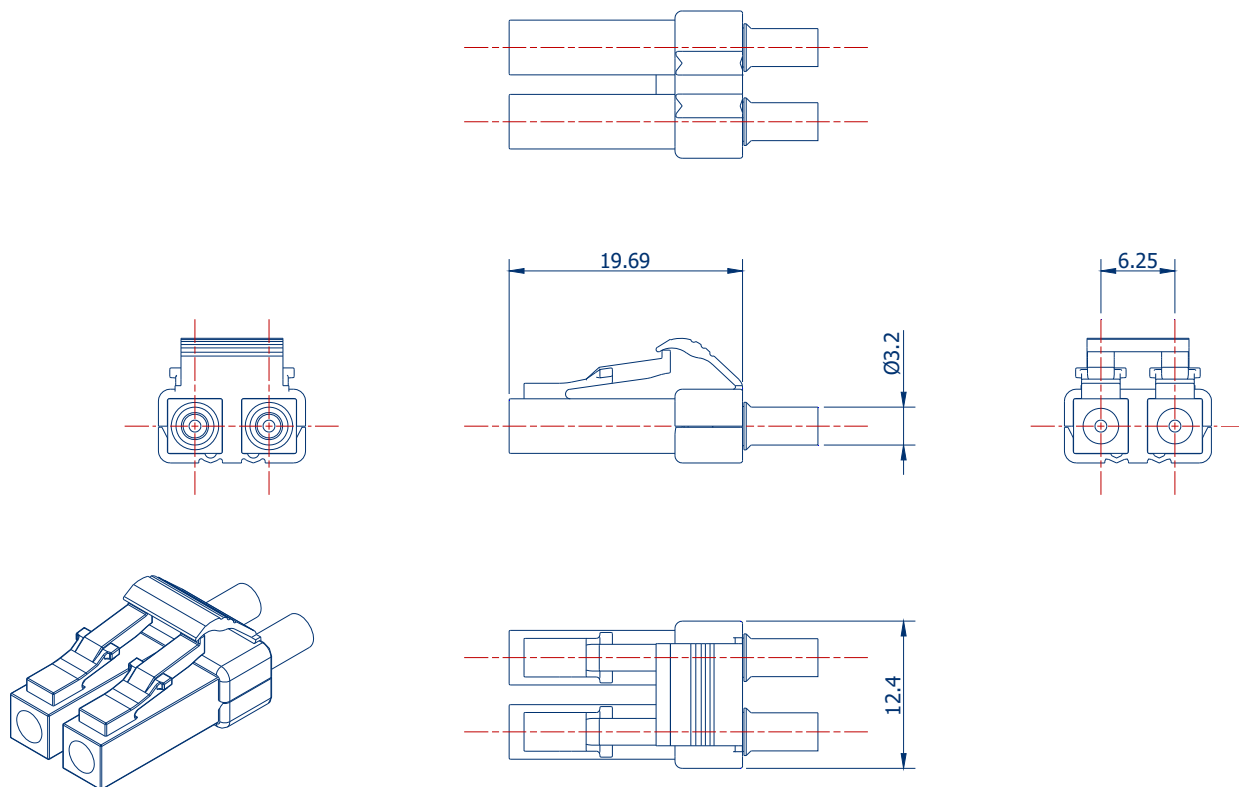


Figure 1
LC POF Plug

CONNECTOR AND CABLE ASSEMBLY POLISHING

For a professional solution to terminating and polishing an LC plug, Firecomms recommends the FiberFin Professional Installation Kit for LC Connectors. Part#: FF-STDLCINST-K

For the most recent revision or further information please visit www.firecomms.com or contact the company directly at the following address, Firecomms Ltd, 2200 Airport Business Park, Cork, IRELAND. Copyright© 2004-2018 Firecomms. All rights reserved. Firecomms refers to Firecomms Limited and/or its subsidiaries. Firecomms assumes no responsibility for inaccuracies or omissions in the information contained in this document. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein.